


MONITOR PRODUCTS, INC.

15400 Flight Path Dr
Brooksville, FL 34604
Tel: 800-334-4591 Sales: ext 201
Technical Assistance: ext 209
Fax: 352-544-0870



MONITOR PRODUCTS INC.
1-800-334-4591
www.monitorpro.com

FRESH WATER COOLING
Kit Specification: MFH-5398
MerCruiser 305-350 CID
Block cooling

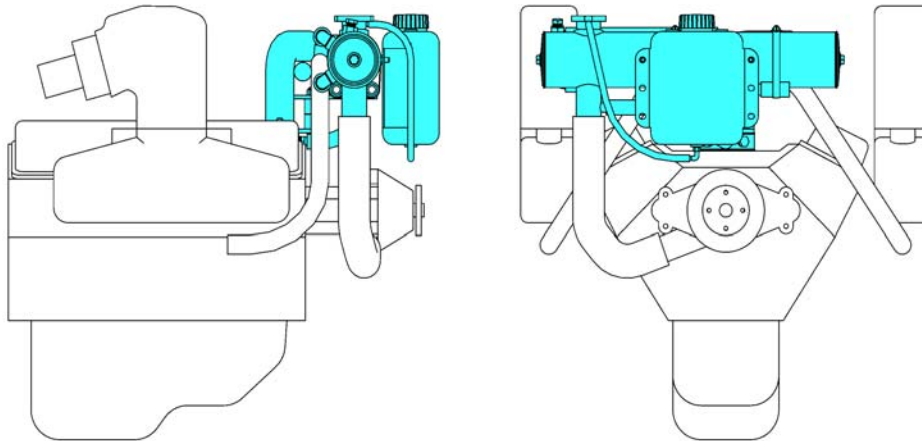

CONVERSION KIT FITS:

Chevy based small block V8 engines 305-350 CID; both sterndrive and inboard. Designed especially for the low capacity raw water pumps used on sterndrive engines. Kit will NOT fit most engines with high mounted alternators, such as late model OMC engines and/or v-drives. Separate kits are available for those engines. Some engines have fuel line routing and fuel filter location that must be slightly changed. Heat exchanger is 3 3/4" in diameter x 21 3/4" long and fits within overall length, width, and height of most engine conversions. See above illustrations. Plastic expansion tank mounts either on front of heat exchanger or, if space is limited, on vertical surface next to engine.

COOLING SYSTEM TYPE

Block only. Engine block is on fresh water system. Exhaust manifolds remain on raw water system.

CONVERSION KIT

A kit includes heat exchanger, heavy-duty translucent plastic expansion tank plus all other components necessary to complete conversion. Some components from the engine are reused. Heat exchanger is primed gray. Brackets and other components are painted black or zinc plated. All hose clamps are stainless steel.

HEAT EXCHANGER

Shell and tube type heat exchanger with special high capacity design. All copper alloy construction made to the highest industry standards. Dual demountable clean out end covers. Zinc anode protection.

MONITOR PRODUCTS, INC.
15400 Flight Path Dr
Brooksville, FL 34604
Tel: 800-334-4591 Sales: ext 201
Technical Assistance: ext 209
Fax: 352-544-0870



FRESH WATER COOLING
Kit Specification: MFH-5398
MerCruiser 305-350 CID
Block cooling

COOLING SYSTEM CAPACITY

System will maintain engine temperature in the 160-170° F range using the 160° F thermostat, included in kit. System has a capacity safety margin higher than industry standards.

HEATER SYSTEM HOOKUP

Heaters, such as galley water heaters and cabin heaters, are easily connected to the system by utilizing the cooling system bypass connections.

INSTALLATION TIME

Typical average installation time is approximately one hour, assuming new engine and normal accessibility. Allow additional time for filling and testing. Installation skills are not beyond those of most do-it-yourself boat owners. Complete illustrated installation instructions are included in kit. Ordinary hand tools are used.

WARRANTY

Two-year warranty on complete kit. Monitor is not responsible for labor charges or any indirect or consequential costs or damages.

MONEY BACK GUARANTEE

Full refund if kit is returned within 30 days in original box and in undamaged condition.

PRICE

Trade and volume discounts are available. Buy through your dealer or direct (Visa, MasterCard, Am Express, UPS COD or money order accepted).