




**Hand Winches**  
Zinc-Plated with TUFFPLATE®

**DL600A**

Standard Equipment: 7" milled-edge steel handle; one-way ratchet with off position.

Specifications: 600 lbs. rated capacity; 3.2:1 gear ratio; 5/8" drum hub diameter. Drum Capacity Maximum Cable Size 5/32" x 61'. Cable not included.

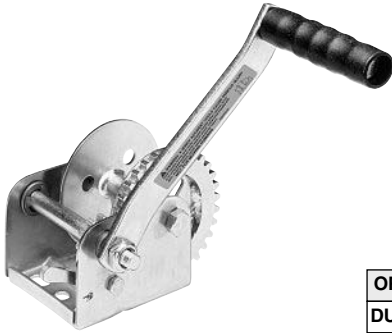


ORDER NO.	PRICE
DUT 600A	\$57.22

**DL900A**

Standard Equipment: 7" milled-edge steel handle with corrugated grip; one-way ratchet with off position.

Specifications: 900 lbs. rated capacity; 3.2:1 gear ratio, 5/8" drum hub diameter. Drum Capacity Maximum Cable Size 3/16" x 40'. Cable not included.

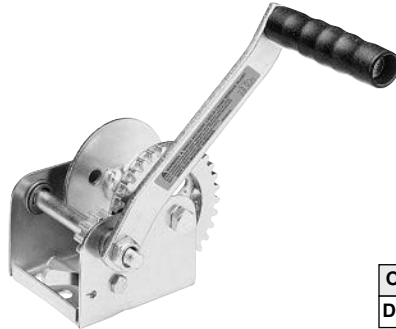

ORDER NO.	PRICE
DUT 900A	\$61.50

**DL1100A**

Standard Equipment: 7" milled-edge steel handle with corrugated grip; one-way ratchet with off position.

Specifications: 1100 lbs. rated capacity; 3.7:1 gear ratio; 7/8" drum hub diameter. Drum Capacity Maximum Cable Size 3/16" x 79'. Cable not included.




ORDER NO.	PRICE
DUT 1100A	\$77.65

**DL1300A**

Standard Equipment: 7" milled-edge steel handle with corrugated grip; one-way ratchet with off position.


Specifications: 1300 lbs. rated capacity; 4.4:1 gear ratio; 7/8" drum hub diameter. Drum Capacity Maximum Cable Size 7/32" x 56'. Cable not included.

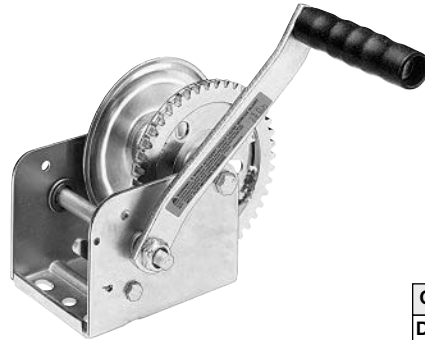

ORDER NO.	PRICE
DUT 1300A	\$62.22

**DL1402A**

Standard Equipment: 9-1/2" milled-edge steel handle with corrugated grip; reversible ratchet. Specifications: 1400 lbs. rated capacity; 4.4:1 gear ratio; 7/8" drum hub diameter. Drum Capacity Maximum Cable Size 1/4" x 40'. Cable not included.

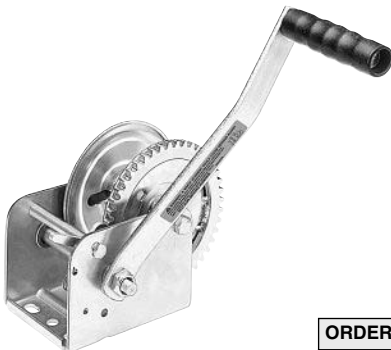

ORDER NO.	PRICE
DUT 1402A	\$71.30

**DL1602A**

Standard Equipment: 9-1/2" milled-edge steel handle with corrugated grip; reversible ratchet.

Specifications: 1600 lbs. rated capacity; 5.4:1 gear ratio, 1-1/8" drum hub diameter. Drum Capacity Maximum Cable Size 1/4" x 58'. Cable not included.



ORDER NO.	PRICE
DUT 1602A	\$87.94

D-L® ratchet winches are not recommended for lifting applications. For lifting, use a self locking winch. D-L® winches are not to be used as hoists for lifting, supporting or transporting people or for loads over areas where people could be present.